

HAZMAT

SAFETY CABINETS

OXIDISING

Agent Storage Cabinets



Suitable for Safe Storage of toxic substances as listed as Class 6.1 substances in the Australian Dangerous Goods code or are a primary risk of another Class or are subsidiary risk of 6.1.

All cabinets comply with AS4452-1997 as follow:

1. Each cabinet is marked with the name and address of the manufacturer
2. The maximum storage capacity
3. Any other notices or warnings that are required by regulatory authorities with a minimum height of 50mm.



Multifile is a long established and privately owned Australian company who are well known for the supply of 'Specialised Storage Solutions' to our clients Australia wide. Our range includes 'Hazardous Storage Cabinets' which are available in a range of sizes and manufactured in accordance with Australian standards.

Australia Wide Shipping • Superior Quality • Industry Experts

OXIDISING

Agent Storage Cabinets

Key Features & Benefits

Isocyanate free two-pack epoxy coating inside and out, providing a hardwearing finish.

Danger alert sign indicating specific hazardous substances stored in cabinets.

Ventilation port, measuring 55mm in diameter.

Fully welded 150mm deep liquid tight sump capable of containing at least 25% of the maximum storage capacity.

Internal shelf brackets that fully interlock with shelves.

1.1mm thick double skin wall construction, with 40mm air gap between walls to provide thermal insulation.


Ventilation port, measuring 55mm in diameter.

Continuous piano hinges ensuring smooth closure of door.

Full instructions on usage of the cabinet attached to the inside of the door.

Build in ground connector.

Round corners on door.

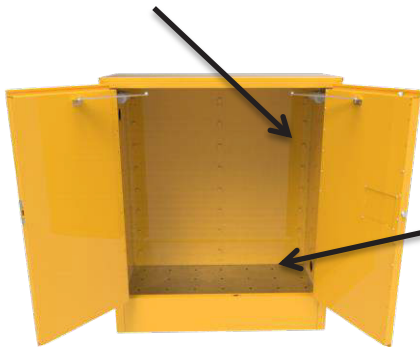

Fully adjustable galvanised shelves, perforated for leakages and to permit free air flow. Easily replaced if damaged.



Easy grip 'D' handle for easy opening of cabinet.



Self closing door mechanism, sequential self closing on double door cabinets.



Self closing non latching doors held shut by magnetic latches, which release in the event of an internal buildup of pressure.



OXIDISING

Agent Storage Cabinets

Ordering Information

OXIDISING AGENT STORAGE CABINETS

Capacity (L)	30	60	100	160	250
Capacity (Units)	1 x 20L or 6 x 2.5L Tins	2 x 20L or 12 x 2.5L Tins	3 x 20L or 15 x 2.5L Tins	6 x 20L Drums	9 x 20L Drums
Part Number	TCOAS30L	TCOAS60L	TCOAS100L	TCOAS160L	TCOAS250L
Shelves	1	2	1	2	3
External Height (mm)	805	1070	810	1295	1830
External Width (mm)	525	515	935	1115	1120
External Depth (mm)	475	470	630	475	520
Internal Height (mm)	520	785	520	1045	1545
Internal Width (mm)	420	420	835	1015	1015
Internal Depth (mm)	375	375	530	375	420
Weight (kg)	53	62	100	138	187



30L



60L



100L



250L

